



# EXPOSED CONCRETE EFFECT SYSTEM

EDITION 2





JAKIM,  
Putrajaya



# introducing ECES

exposed concrete effect system

Our Exposed Concrete Effect System is a **texture coating** that highlights the beauty of industrial modernity and minimalism. Mirroring raw concrete in its original form, the simplicity of ECES complements various designs and atmospheres, on both interior and exterior surfaces.

"ECES is easily applied on-site  
and is molded directly onto  
various types of surfaces"




## ADVANTAGES OF ECES

Suzuka's ECES (Exposed Concrete Effect System) is a simple and durable texture coating, suitable for both interiors and exteriors. It is easily applied on-site and is molded directly onto various types of surfaces, catering to the shape of your wall.

ECES requires very minimal maintenance and is only composed of top quality ingredients such as fluorocarbon resin. Also, ECES retains strong resistance against cracking, water seepage and rough weather conditions.

Furthermore, in staying true to the environment, ECES is free of lead, mercury, acid and alkali.


Choose from our selection of patterns and shades to bring the stark elegance of simple concrete to your home or office space.

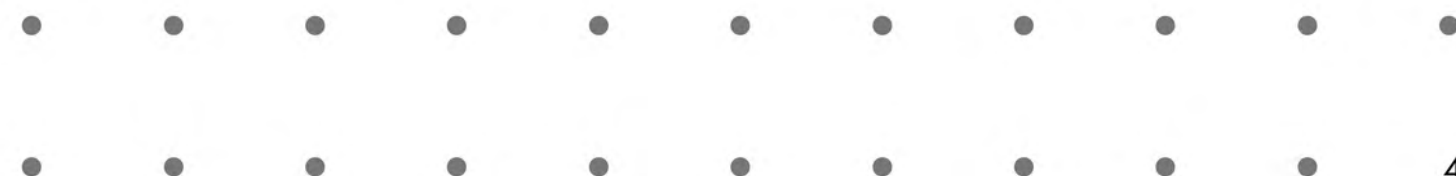





## application

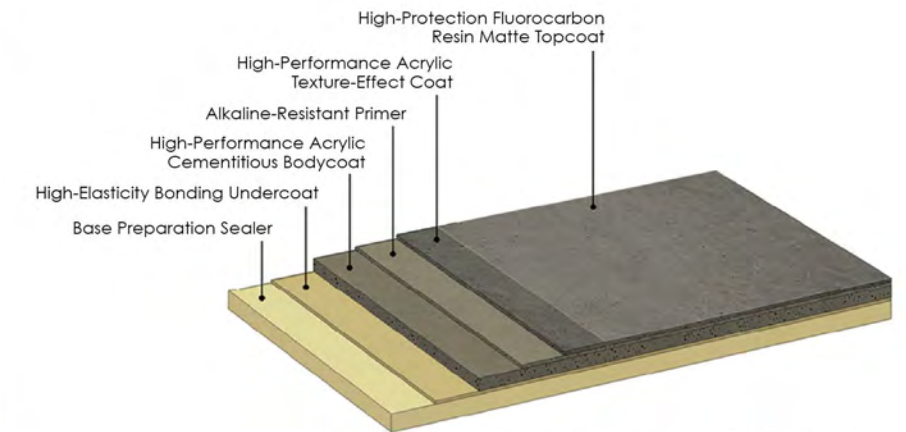

Note : Coating system varies based on the type of design and existing surface.







Option 1



Option 2



Option 3

## colour

A wide range of colours are available for customization, in addition to the ones shown.


\*Colour appearance may vary due to lighting conditions and printing. Please examine actual product samples prior to ordering.




# design

A variety of designs can be customized to suit your preferences, in addition to the ones shown below.


## Pre-Cast pattern

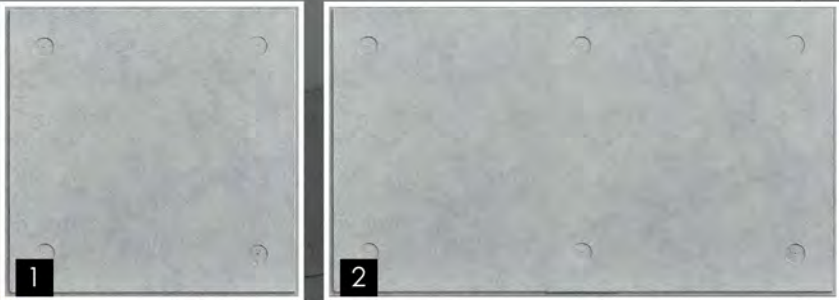

## Groove line options

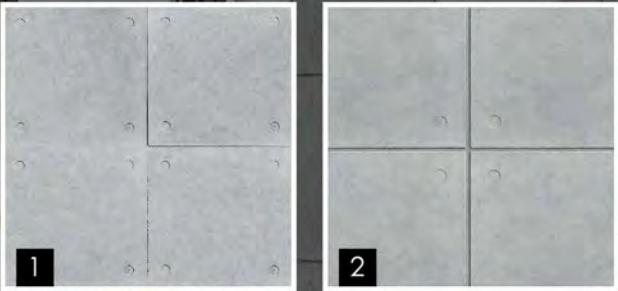

## Timber pattern

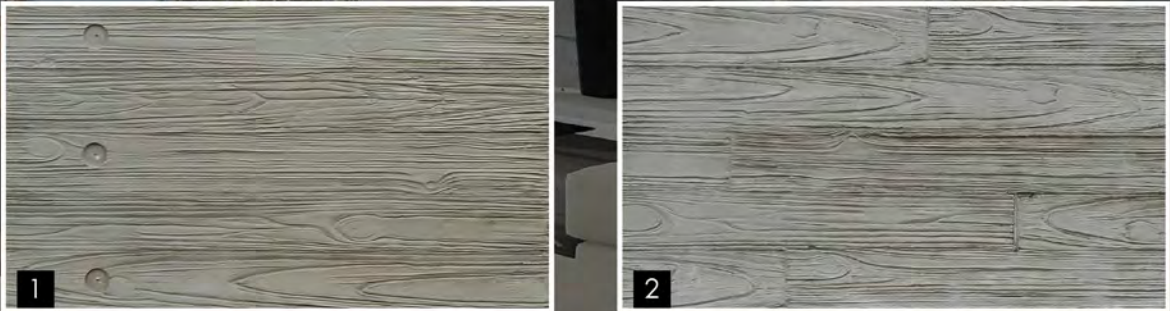

## Pitted pattern



## ECES Can Be Applied On

| Applicable Surfaces                                                 | Interior | Exterior |
|---------------------------------------------------------------------|----------|----------|
| Cement plaster                                                      | ✓        | ✓        |
| Previously painted substrates & surfaces (with surface preparation) | ✓        | ✓        |
| Sand boards (at least 10mm thick)                                   | ✓        | ✓        |
| Plywood boards (at least 10mm thick with primer)                    | ✓        | ✗        |
| MDF boards (at least 10mm thick with primer)                        | ✓        | ✗        |

## Why Pick ECES Over Exposed Concrete

| Factors                               | Raw Concrete                                                       | ECES  |
|---------------------------------------|--------------------------------------------------------------------|--------------------------------------------------------------------------------------------|
| Overall Cost                          | More costly (requires more material & is harder to install)        | Less costly (requires less material & is simpler to install)                               |
| Duration of Installation              | Long (casting & drying process requires extensive time)            | Short (ECES is applied on as a texture coating)                                            |
| Set-Up Equipment                      | Requires extensive equipment for pouring & casting                 | Requires only basic equipment for texture coating application                              |
| Application Process                   | Complex                                                            | Simple                                                                                     |
| Applicable Places                     | Limited (weight of material cannot be supported by all structures) | Unlimited (weight of material is easily supported by structures)                           |
| Design Options                        | Limited                                                            | Unlimited                                                                                  |
| Durability Against Weather Conditions | Strong                                                             | Strong                                                                                     |



TAIWAN • MALAYSIA • THAILAND



Suzukacoat (M) Sdn Bhd

Lot 6492, Jalan Abdul Manan, Off Jalan Meru,  
41050 Klang, Selangor Darul Ehsan, Malaysia.  
Tel : +603-3291 0722  
Fax : +603-3290 3469  
Helpline : 1300-88-0722

