L-VJM10A ALUMINIUM UNIDIRECTIONAL PROJECTION LOUDSPEAKER

- Intelligible voice and superior sound reproduction
- Ceiling or wall mount
- Meets virtually any indoor and outdoor requirement
- EN54-24 certified
- Complies with IP65 standard
- Available with or without capacitor(part number without "C")



PRODUCT DESCRIPTION

L-VJM10A/EN is a high-performance 10W voice alarm unidirectional projection loudspeaker. It provides a broad frequency response range, low distortion and high sound pressure level for accurate and intelligible broadcast of evacuation messages and high quality sound reproduction. It can be used in indoor, outdoor, dry, or wet applications, providing reliable operations over wide temperature and humidity ranges.


Its low-profile, white color design blends easily with most interiors in locations such as hotels, conference rooms, cinemas, theme parks, factories and exhibitions. This voice alarm unidirectional projection loudspeaker complies with BS5839 part 8 and EN54 part 24

Technical Specification	
Max power	20 W
Rated power	10 W
Power taps @ 100V	10W/5W/2.5W/1.25W
SPL at 10W/1W (100Hz-10KHz, 1m)	98 dB / 89 dB
SPL at 10W power/1W (100Hz-10KHz, 4m)	86 dB / 77dB
Frequency response (-10dB)	150 Hz -20 KHz
Rated impedance	1 Ω/2 ΚΩ/4 ΚΩ/8 ΚΩ


Rated input voltage	100 V / 70 V
Connector	Fire-resistant cable
Dimensions (D x L)	Φ140 × 195 mm
Weight	2.62 Kg
Color	White(RAL9003)
Material	Aluminum
DC Blocking Capacitor	Yes (2.7uF) L-VJM10A/EN(C)
	No L-VJM10A/EN



Frequency Response

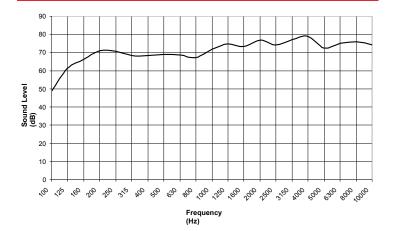


Circuit Diagram




* unit fitted with capacitor

Polar Diagram



Three- View Diagram



For more information,

https://honeywellbuildings.in Call: 1-800-103-0339 Email: HBT-Indiabuildings@honeywell.com

Honeywell HBT India Buildings

Unitech Trade Center, 5th Floor, Sector-43, Block C, Sushant Lok Phase - I, Gurgaon - 122 002

