# L-VCM6A/EN 6.5" METAL CEILING LOUDSPEAKER WITH METAL DOME

- Excellent sound reproduction
- · Fire resistant cover with fire dome
- EN54-24 certified
- Available with or without capacitor(part number without "C")





# PRODUCT DESCRIPTION

L-VCM6A/EN (C) Voice Alarm ceiling loudspeaker is designed for flush in suspended ceiling and ideal for even sound distribution. The loudspeaker has a built-in protection to ensure that, in the event of a fire, damage to the loudspeaker does not result in failure of the loudspeaker circuit which is connected. In this way, system integrity is maintained and ensuring loudspeakers connected in the same circuit in other

areas can still using the mounting spring attached. be used to inform people of the situation.

The loudspeaker can be easily installed by Likewise, the fire dome is mounted in the speaker openings on the ceiling panel by using the sliding brackets and the wing nuts as first-fix.

L-VCM6A/EN(C) is equipped with ceramic fuse and heat-resistant, hight temperature wiring to comply with EN54 part 24.

Technical Specification	
Max power	9 W
Rated power	6 W
Power taps @ 100V6 W / 3 W / 1.5 W / 0.75 W	
Power taps @ 70V	3W/1.5W/0.75W/0.375W
SPL at 6W/1W (100 Hz-10 KHz,1m)	99dB/91dB
SPL at 6W/1W (100 Hz-10 KHz,4m)	87dB/79dB
Frequency range (-10dB)	170 Hz - 20k Hz
Dispersion angle (1KHz/-6dB)	170°
Rated impedance	$1.7$ k $\Omega/$ $3.3$ k $\Omega/$ $6.7$ k $\Omega/$ $13$ k $\Omega$


Rated input voltage	100 V / 70 V
Connection	Ceramic Terminal
Dimensions	Φ 2 22 mm × 129 mm
Hole cut-out size	Φ195mm
Diameter of speaker	6.5"
Weight of magnet	1.57 kg
Front grill color	White (RAL9003)
Dome color	Red ( RAL3000 )
Thermal Fuse	150°C
DC Blocking capacitor	Yes (2.2uF) L-VCM6A/EN(C)
	No L-VCM6A/EN




#### **Frequency Response**

# 


### **Circuit Diagram**



# **Polar Diagram**



### **Three- View Diagram**

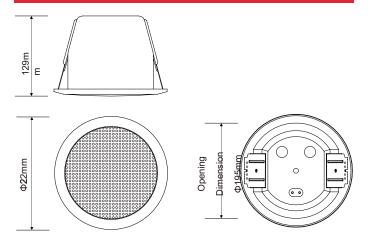

#### For more information,

https://honeywellbuildings.in Call: 1-800-103-0339 Email: HBT-Indiabuildings@honeywell.com

#### Honeywell HBT India Buildings

Unitech Trade Center, 5th Floor, Sector-43, Block C, Sushant Lok Phase - I, Gurgaon - 122 002 6.5" METAL
CEILING LOUDSPEAKER WITH
METAL DOME
Honeywell